



Technical Requirements for LED-based Horticultural Lighting

Version 2.1

Proposed Effective Date: September 1, 2021

Horticultural lighting products using LEDs must comply with the provisions of this document to be eligible for listing on the DLC Solid-State Horticultural Lighting Qualified Products List (“Horticultural QPL”, “Hort QPL”). Products eligible for DLC qualification must be complete LED light fixtures or lamps. That is, they must be electromagnetic radiation-generating devices analogous to luminaires (or fixtures) or LED lamps (integrated and non-integrated) as defined by ANSI/IES LS-1 sections 6.8.5 and 10.3.1 or 6.8.5.3 and 6.8.5.4, respectively.

Version 2.1 of the Horticultural Technical Requirements establishes eligibility and performance criteria for three new horticultural lighting product types: externally supplied actively cooled fixtures, DC-powered fixtures, and LED replacements for linear fluorescent and HID lamps. These new requirements support the qualification of fixtures that enable greater whole facility energy savings by removing excess heat from the grow environment, among other strategies.

Definitions

Unless otherwise noted, DLC policy nomenclature directly references the definitions from the American Society of Agricultural and Biological Engineers (ASABE) *ANSI/ASABE S640: Quantities and Units of Electromagnetic Radiation for Plants (Photosynthetic Organisms)*, and, where applicable, the Illuminating Engineering Society (IES) *ANSI/IES LS-1-20, Lighting Science: Nomenclature and Definitions for Illuminating Engineering*, with key deviations or interpretations noted. Each mention of the term “LED device” in this document is meant to reference LED packages, modules, or arrays.

Eligibility

Products designed and intended to operate with standard North American nominal AC line voltages (typically 120V-480V) or with DC voltages below 600V are eligible for DLC qualification. The following are further eligibility rules for horticultural lighting equipment:



- 27
- 28
- 29
- 30
- 31
- 32
- 33
- 34
- 35
- 36
- 37
- 38
- 39
- 40
- 41
- 42
- 43
- 44
- 45
- 46
- 47
- 48
- 49
- 50
- 51
- 52
- 53
- 54
- 55
- 56
- 57
- 58
- 59
- 60
- 61
- 62
- 63
- Products that are light engines (analogous to LS-1 section 6.8.5.5) or identified as retrofit kits intended to replace the light sources or other structures within an existing fixture are not eligible for qualification at this time.
 - Fixtures and/or lamps that incorporate light sources other than LED, whether as sole-source or as LED-hybrid fixtures, are not eligible for qualification at this time.
 - Products that are dynamically configurable, i.e. having no defined configuration or set of configurations and whose form factor may vary in the grow facility, are not eligible for qualification as an AC product at this time.
 - Manufacturers must list full and complete model numbers that clearly demonstrate all qualified product options offered.
 - “Full and complete model numbers” means model numbers that include all performance-affecting and non-performance-affecting variations offered, and that do not omit any option that is available to customers in the market. In general, options that do not affect the performance of the product can be submitted as a single model number, and the multiple options can be denoted by bracketing them in the model number.
 - For example, a product that has multiple exterior paint color options or mounting options that do not affect performance may include all color and mounting options in brackets (e.g. "[WH, BLK, SLV, GRY]") within a single model number. Low and high voltage options may be submitted as a single model number (e.g. "ABC 300 [120V-277V, 347V-480V] WH") with the worst-case performance reported. Multiple driver variations may be included in single product applications, as noted above, and listed in a single model number, as long as they perform nominally the same. If the drivers perform nominally differently – that is, they are not presented to customers as having the same performance other than voltage input and result in different ordering codes – then the unique drivers must be listed in separate model numbers. Options that affect the flux output, presence or lack of dimming capabilities, or spectral tuning options cannot be bracketed and submitted as a single model number.
 - DLC reviewers may check web listings and other marketing materials and reserve the right to request additional information to demonstrate the full and complete model number. A lack of clarity in model numbers will result in delayed application processing; misrepresentation of model numbers discovered outside the application process will generally be considered a violation of the DLC program and trademark rules and may result in delisting.
 - Each model number may only represent the fixture/lamp under a single brand. If the fixture/lamp can be sold under multiple brands, model numbers must be listed separately for each brand.

64



65 **Testing Methods and Requirements**

66 The DLC Technical Requirements for LED-based Horticultural Lighting are as follows. Details explaining
 67 each item follow **Table 1**.

68 **Table 1: DLC Horticultural Lighting Technical Requirements**

Parameter/Attribute/Metric	Requirement	Requirement Type	Method of Measurement/Evaluation
Photosynthetic Photon Flux (Φ_p or PPF) ($\mu\text{mol} \times \text{s}^{-1}$)	n/a	Reported	(ANSI/IES LM-79) 400-700nm range, with 400-500nm, 500-600nm, and 600-700nm bins reported alongside the total
Far-Red Photon Flux ($\Phi_{p,fr}$ or PPF _{FR}) ($\mu\text{mol} \times \text{s}^{-1}$)	n/a	Reported	(ANSI/IES LM-79) 700-800nm range
Photon Flux (PF _{PBAR}) ($\mu\text{mol} \times \text{s}^{-1}$)	n/a	Reported (Optional)	(ANSI/IES LM-79) 280-800nm range
Spectral Quantum Distribution (SQD) ($\mu\text{mol} \times \text{s}^{-1} \times \text{nm}^{-1}$)	n/a	Reported	(ANSI/IES LM-79) (ANSI/IES TM-33-18) 400-800nm range
Photosynthetic Photon Intensity Distribution (I_p or PPID) ($\mu\text{mol} \times \text{s}^{-1} \times \text{sr}^{-1}$)	n/a	Reported	(ANSI/IES LM-79) (ANSI/IES TM-33-18) 400-700nm range
Photosynthetic Photon Efficacy ¹ (K_p or PPE) ($\mu\text{mol} \times \text{J}^{-1}$)	$\geq 1.90 \mu\text{mol} \times \text{J}^{-1}$	Required/ Threshold	(ANSI/IES LM-79) 400-700nm range
Photon Efficacy (PE _{PBAR}) ($\mu\text{mol} \times \text{J}^{-1}$)	n/a	Reported (Optional)	(ANSI/IES LM-79) 280-800nm range

¹ DC-powered fixtures must meet the PPE threshold requirement at their AC de-rated PPE value. See “Special Considerations for DC-Powered Fixtures” for more information on AC de-rating.

Parameter/Attribute/Metric	Requirement	Requirement Type	Method of Measurement/Evaluation
Photon Flux Maintenance, Photosynthetic (PFM_P)	Q ₉₀ ≥36,000 hours	Required/Threshold	(ANSI/IES LM-80 / IES TM-21 or IES LM-84 / IES TM-28) 400-700nm range, fixture technical specification sheet, and <i>In-Situ Temperature Measurement Test (ISTMT)</i>
Photon Flux Maintenance, Far-Red (PFM_{FR})	Report time to Q ₉₀	Reported	(ANSI/IES LM-80 / IES TM-21 or IES LM-84 / IES TM-28) 700-800nm range
Driver Lifetime	≥50,000 hours	Required/Threshold	Driver technical specification sheet, fixture technical specification sheet, and <i>In-Situ Temperature Measurement Test (ISTMT)</i>
Fan Lifetime	≥50,000 hours	Required/Threshold	Fan technical specification sheet, fixture technical specification sheet
Warranty	Fixtures: ≥5 years Lamps: ≥3 years	Required/Threshold	Legal warranty terms & conditions
Power Factor (PF)	≥0.9	Required/Threshold	Benchtop electrical testing or ANSI/IES LM-79
Total Harmonic Distortion, Current (THDi)	≤20%	Required/Threshold	Benchtop electrical testing or ANSI/IES LM-79
Safety Certification	Horticultural Lighting designation by OSHA NRTL or SCC-recognized body	Required/Threshold	ANSI/UL 8800 (ANSI/CAN/UL 8800)

69

70

71 Output Characteristics

72 The DLC requires testing and reporting of the following characteristics for the output of horticultural
73 lighting devices.

- 74 • **Photosynthetic Photon Flux (Φ_p or PPF), ($\mu\text{mol} \times \text{s}^{-1}$)**

75 This is the total output of the product over the specific range of wavelengths defined by
76 ANSI/ASABE S640 for PPF (400-700nm). This metric is an integrated value for the entire fixture
77 and contains no spectral or directional information.

78 The DLC Horticultural QPL reports on both the total and ~100nm-wide “bins” of flux within this
79 range to allow end users to understand the fixture’s relative proportions. Test information must
80 provide output in these ranges specifically, in addition to the total 400-700nm output.

- 81 • **Far-Red Photon Flux ($\Phi_{p,fr}$ or PFR), ($\mu\text{mol} \times \text{s}^{-1}$)**

82 This is the output of the product over the “far-red” band defined by ANSI/ASABE S640 (700-
83 800nm). This metric is an integrated value for the entire fixture and contains no spectral or
84 directional information. This metric is reported only and does not have a qualifying threshold.

85 The DLC Horticultural QPL reports on the total flux of this 100nm-wide band separately for end
86 users’ informational needs.

- 87 • **Photon Flux (PF_{PBAR}), ($\mu\text{mol} \times \text{s}^{-1}$)**

88 This is the output of the product over a plant’s “photobiologically active radiation” (PBAR)
89 wavelength range (280-800nm). This metric is an integrated value for the entire fixture and
90 contains no spectral or directional information. This metric is optionally reported only and does
91 not have a qualifying threshold.

92 The DLC Horticultural QPL reports on the total flux of this PBAR band specifically for end users’
93 informational needs. PF_{PBAR} is intended to convey UV, PAR, and FR radiation, which are often
94 associated with photomorphological effects in plants. PF_{PBAR} is not an ASABE S640 defined term
95 and is not required for DLC qualification, though it can be reported and listed if desired by
96 applicants.

- 97 • **Photon Efficacy (PE_{PBAR}), ($\mu\text{mol} \times \text{J}^{-1}$)**

98 This is the output of the product over a plant’s “photobiologically active radiation” (PBAR) band
99 (280-800nm) divided by the total electrical input watts to the fixture, including any other
100 ancillary loads (controllers, sensors, cooling fans, etc.) used within the lighting system. This
101 metric is an integrated value for the entire fixture and contains no spectral or directional
102 information. This metric is optionally reported only and does not have a qualifying threshold.

103 The DLC Horticultural QPL reports on the total flux of this PBAR band specifically for end users’
104 informational needs. PE_{PBAR} is intended to convey luminaire efficacy in converting electrical
105 energy into UV, PAR, and FR radiation, which are often associated with photomorphological
106 effects in plants. PE_{PBAR} is not an ASABE S640 defined term and is not required for DLC
107 qualification, though it can be reported and listed if desired by applicants.

108

109 • **Spectral Quantum Distribution (SQD), ($\mu\text{mol} \times \text{s}^{-1} \times \text{nm}^{-1}$)**
110 This is the distribution of photon flux per photon wavelength over the photosynthetic and far-
111 red range of wavelengths defined by ANSI/ASABE S640 (400-800nm). The DLC will also accept
112 the distribution of photon flux per photon wavelengths over the PBAR range (280-800nm).
113 When reporting either of the optional PBAR metrics (i.e. PF_{PBAR} and PE_{PBAR}), distribution of
114 photon flux over the PBAR range is required. This distribution is measured and reported as
115 integrated in all directions from the fixture and contains no granular directional information
116 itself. This distribution must be measured and reported from an appropriately accredited
117 facility.

118 An image of this distribution must be submitted within the application in a .jpg graphical file
119 format, at a size of 300x300 pixels or larger. This image will be accessible to users on the QPL.
120 The DLC intends to utilize the required .xml file per ANSI/IES TM-33-18 to generate these images
121 in the future.

122 Please refer to the [TM-33-18 Reporting and Photometric/Spectral Reporting Alternatives](#) section
123 for additional information.

124 • **Photosynthetic Photon Intensity Distribution (I_p or PPID), ($\mu\text{mol} \times \text{s}^{-1} \times \text{sr}^{-1}$)**
125 This is the distribution of photosynthetic photon intensity per unit solid angle leaving the fixture.
126 This distribution is measured and reported as integrated for all wavelengths across the 400-
127 700nm range leaving the fixture and contains no spectral distribution information itself. This
128 distribution must be measured and reported from an appropriately accredited facility.

129 An image of this distribution is to be submitted within the application in a .jpg graphical file
130 format, at a size of 300x300 pixels or larger. This image will be accessible to users on the QPL.
131 The DLC intends to utilize the required .xml file per ANSI/IES TM-33-18 to generate these images
132 in the future.

133 Please refer to the [TM-33-18 Reporting and Photometric/Spectral Reporting Alternatives](#) section
134 for additional information.

135 *Note: The DLC will no longer accept distribution data that are developed through in-house*
136 *assessments. Products that were qualified prior to the V2.0 effective date must provide TM-33-*
137 *18 documents by December 31, 2021, to requalify to the V2.0 Technical Requirements, or the*
138 *products will be delisted.*

139 Efficacy

140 The DLC requires testing and reporting of photosynthetic photon efficacy (PPE), which is the output of
141 the fixture over the specific range of wavelengths defined by ANSI/ASABE S640 for PPF (400-700nm),
142 divided by the total electrical input watts to the fixture, including any other ancillary loads (controllers,
143 sensors, cooling fans, etc.) used within the lighting system.

144 All products are required to have a PPE of $\geq 1.90 \mu\text{mol} \times \text{J}^{-1}$. In both submitted applications and under
145 surveillance testing, the DLC allows an absolute tolerance of -5% to this threshold value. The result of
146 this is the DLC's acceptance of any test report showing an efficacy of $1.81 \mu\text{mol} \times \text{J}^{-1}$ or higher, and the
147 disqualification of any product, either during submission or surveillance testing, with a test report

148 showing an efficacy less than $1.81 \mu\text{mol} \times \text{J}^{-1}$, at any point in the product's specified operating voltage
149 range. All evaluations and listings of this measurement will be rounded to the nearest hundredth.

150 If a product contains multiple drivers:

- 151 • All driver specification sheets must be provided.
- 152 • For each unique driver used, manufacturers must provide electrical testing to document which
153 driver variation results in the overall minimum K_p (PPE) or worst-case driver efficiency, as well as
154 which variation results in the overall worst-case power quality (THDi and PF).
 - 155 ○ This testing must include the input current and wattage; the output voltage, current,
156 and wattage; and the THDi and PF for each driver, at each nominal input voltage.
 - 157 ○ In-house (i.e. non-accredited lab) benchtop electrical testing is sufficient for
158 demonstrating the driver variation that yields the overall minimum K_p (PPE) and
159 minimum power quality at the applicable loading conditions and at the applicable input
160 voltages.
 - 161 ○ From this electrical characterization testing, the product and conditions representing
162 worst-case efficacy must undergo formal whole-fixture LM-79 testing by an accredited
163 testing lab.
 - 164 ○ For questions about testing requirements for family grouping applications, please refer
165 to the [Family Grouping Application Requirements for LED-based Horticultural Lighting](#).
- 166 • Drivers that result in explicitly different nominal fixture performance (for example, a driver
167 change that results in different flux output by the product, determined at the DLC's discretion)
168 are not permissible variations within a single model number and are required to submit a family
169 grouping application for QPL listing. If alternate driver variations result in different input
170 wattage, worst-case will be published on the QPL.
 - 171 ○ Please refer to the [Family Grouping Application Requirements for LED-based
172 Horticultural Lighting](#) for specific testing and reporting requirements for product
173 families.

174 Long-Term Performance

175 The DLC requires the following performance data to characterize the long-term performance of the
176 fixture:

- 177 • **Flux Maintenance, Φ_p (PPF) and $\Phi_{p,fr}$ (PF_{FR})**
178 This is a characterization of the ability of the device to maintain its output within the given
179 parameters over time. Given that device output of interest is measured in quanta of photons,
180 and not in lumens, the DLC will use the general engineering term for quanta, "Q", instead of the
181 more-familiar "L" prefix used within general illumination applications.
 - 182 ○ The DLC requires either LED device-level or whole-fixture testing and projections in
183 accordance with the (LM-80 and TM-21) or (LM-84 and TM-28) industry standards
184 sufficient for a Q_{90} of $\geq 36,000$ hours within the Φ_p (PPF) range (400-700nm).

- 185
- 186
- 187
- 188
- 189
- 190
- 191
- 192
- 193
- 194
- 195
- 196
- 197
- 198
- 199
- 200
- 201
- 202
- 203
- 204
- 205
- 206
- 207
- 208
- 209
- 210
- 211
- 212
- 213
- 214
- 215
- 216
- 217
- 218
- 219
- 220
- 221
- 222
- 223
- 224
- 225
- The “Q” in the Q_{90} value is based strictly on the value shown in cell I42 of the ENERGY STAR [TM-21 calculator](#) or cell I45 of the ENERGY STAR [TM-28 calculator](#).
 - All TM-21 or TM-28 projections must be made at the maximum ambient temperature on the fixture’s specification sheet. See [In-Situ Temperature Measurement Testing \(ISTMT\)](#) information below for additional details. All temperature values shall be reported in degrees Celsius.
 - The DLC requires testing and projections to report Q_{90} for the $\Phi_{p,fr}$ (PF_{FR}) range of 700-800nm, but does not make determinations or qualifications based on this data. Please see a description of PF_{FR} -specific testing requirements in the [“For fixtures using multiple types of LEDs”](#) section below.
 - To support PF_{P} and PF_{FR} projections, LM-80/LM-84 information must be provided for both the 400-700nm and the 700-800nm range.
 - All new product submissions using the LM-80/TM-21 approach are required to provide LM-80 data in appropriate (PPF , PF_{FR}) units, measured as such at all time points in the LM-80 procedure. The DLC reserves the right to request additional information for all reports referring to “photon flux” that are ambiguous (based on product SQD) about the division of said flux between the PPF and PF_{FR} categories to determine approval.
 - Products qualified with non- PPF units that were converted into PPF units during the provisional period (i.e. prior to V1.2) will be required to provide LM-80 data in appropriate units to requalify under the V2.0 Technical Requirements.
 - Provisionally qualified products will be allowed to update their listings to remove any caveats by submitting actual data by December 2021. The DLC will process these update applications through the month of December 2021.
 - Products may not be qualified and listed on the QPL without long-term performance data for flux degradation. Products that use LEDs for which no LM-80 data is available are required to undergo LM-84 testing for TM-28 projections.
 - *In-Situ Temperature Measurement Testing (ISTMT)*:
 - ISTMTs must be conducted and provided for the hottest LED in the fixture, and LED-device level drive current must be reported.
 - ISTMTs must be conducted and reported in the same manner as thermal testing for safety certification. Specifically, applicants must report the operating temperature of the LED at the fixture’s highest rated ambient temperature within the ISTMT report. This must be done in accordance with acceptable procedures from safety certification standards for measuring and projecting operating temperatures. For example, if a fixture is rated for operation at 40°C ambient, ISTMTs are not accepted if they only show the temperature of the LED when measured during a 25°C ambient condition. In this example, appropriate

- 226 steps must be taken to characterize the LED operating temperature when the
227 fixture is in a 40°C ambient environment, as defined by the thermal portions of
228 the relevant safety standards.
- 229 ○ For fixtures using multiple types of LEDs:
 - 230 ■ LM-80 reports (if being used instead of whole-fixture LM-84 data) must be
231 provided for each type of LED device present in the fixture.
 - 232 – For DLC evaluations, LED “type” is differentiated by the nominal output
233 of the LED device or the manufacturer of that LED device. For example,
234 a fixture incorporating four different LEDs, with nominal emissions of
235 440nm, 660nm, 730nm, and a 5000K “white”, is required to provide
236 four LM-80s and associated information for TM-21 projections,
237 corresponding to each of these nominal designations. Some limited
238 cross-applicability of LM-80 data is allowed within phosphor-converted
239 white LEDs of the same series; see [LM-80 applicability](#) information
240 below.
 - 241 ■ ISTMT testing must be provided on the hottest of each LED type (for example,
242 the hottest blue, white, and red LED in the fixture, respectively).
 - 243 ■ Maximum LED drive current must be reported for each LED type.
 - 244 ■ For PFM_p (400-700nm), each LED type present in the fixture that has at least
245 25% of its per-device flux in the PPF range must independently meet the Q₉₀ ≥
246 36,000 hours requirement, as shown by a TM-21 calculation. The DLC does not
247 require device-level SQD data from applicants and will typically accept the
248 applicant’s descriptions of a device’s relative PPF while reserving the right to
249 request explanation.
 - 250 ■ The DLC requires calculated PFM_{FR} for all fixtures with a PF_{FR} output that is equal
251 to or greater than 5% of the fixture’s flux from 400-800nm. For PFM_{FR} (700-
252 800nm), each LED type present in the fixture that has at least 25% of its per-
253 device flux in the PF_{FR} range must report its Q₉₀ duration in hours. The DLC does
254 not require device-level SQD data from applicants and will typically accept the
255 applicant’s descriptions of a device’s relative PF_{FR}, while reserving the right to
256 require explanation. There is no threshold performance requirement across this
257 far-red range; it is a reported value only.
 - 258 ○ LM-80 applicability:
 - 259 ■ For phosphor-converted “white” LEDs within the ANSI nominal chromaticity
260 range, the DLC follows the [ENERGY STAR Requirements for the Use of LM-80](#)
261 [Data](#) published September 2017. Consistent with the ENERGY STAR
262 requirements, for narrow-band emitters, the DLC generally requires an LM-80
263 for each distinct nominal product offered by an LED device manufacturer.
264 Devices of the same type but with different optical codes for beam spread are
265 allowed to cross-apply LM-80 testing. This also applies to products that are in
266 the same series with differences in nomenclature due to marketing changes

267 (see series provisions of ENERGY STAR requirements document). The DLC
268 reserves the right to require additional information to approve all claims of LM-
269 80 applicability.

270 • **Warranty**

271 Products must have a manufacturer-provided product warranty of at least five years for fixtures
272 and three years for lamps. The warranty terms and conditions must be provided as part of the
273 submittal for qualification. The warranty must cover the complete luminaire and must clearly
274 explain the terms and conditions associated with the warranty. Note that “luminaire” includes
275 light source, housing, heat sink, power supplies, and other electrical components, optics, and
276 any other components such as cooling fans or controls (if present).

277 Warranty terms and conditions can vary widely from manufacturer to manufacturer. The DLC
278 explicitly defines a warranty period of five years for fixtures and three years for lamps and does
279 not have specific requirements for warranty claim terms (e.g. labor, recommissioning, etc.)
280 other than those listed above. The DLC does not verify or validate a manufacturer’s terms,
281 conditions, or process for customer warranty claims. The DLC does not monitor field failure
282 rates of qualified products, or warranty policy redemption or history among manufacturers.
283 Industry stakeholders are urged to review warranty terms and conditions as part of the
284 purchasing decision process.

285 • **Driver ISTMT**

286 Applicants must supply a technical specification sheet for the driver(s) they use in their product,
287 showing the lifetime of the driver based on operating temperature and the temperature
288 measurement point (TMP) for monitoring the operating temperature of the driver. In-situ
289 temperature measurement testing must be conducted, and a report must be provided with the
290 application showing an operating temperature consistent with the driver specification sheet
291 information and demonstrating that the driver will have a lifetime of at least 50,000 hours when
292 operating at or above the highest rated ambient temperature on the fixture’s specification
293 sheet. All temperature values shall be reported in degrees Celsius.

294 As noted in the [ISTMT](#) description within the flux maintenance section, driver ISTMTs must be
295 conducted and reported in the same manner as thermal testing for safety certification.
296 Specifically, applicants must report the operating temperature of the driver at the fixture’s
297 highest rated ambient temperature within the ISTMT report. This must be done in accordance
298 with acceptable procedures from safety certification standards for measuring and projecting
299 operating temperatures. For example, if a fixture is rated for operation at 40°C ambient, ISTMTs
300 are not accepted if they only show the temperature of the driver when measured during a 25°C
301 ambient condition. In this example, appropriate steps must be taken to report the driver
302 operating temperature when the fixture is operating in a 40°C ambient environment, as defined
303 by the thermal portions of the relevant safety standards.

- 304 ○ For products that may use multiple drivers, specification sheets for each driver must be
305 provided with the details above. Testing must be conducted on each driver at its
306 appropriate worst-case input voltage. If a product uses multiple drivers from the same
307 manufacturer product line or series, as determined by the DLC, then the single worst-

308 case thermal ambient environment of the product line or series requires a driver ISTMT.
309 Typically, the DLC will operate with the expectation that the operating condition at the
310 highest wattage in the driver manufacturer's product line or series is the worst-case
311 thermal ambient environment, but the DLC may ask the manufacturer to provide
312 detailed evidence to document the worst-case driver thermals.

313 ▪ Custom and integrated drivers must provide documentation equivalent to that
314 required for drivers from third-party vendors. Manufacturers must supply
315 documentation indicating the maximum acceptable temperature for the driver
316 for 50,000-hour life, as well as the TMP to be used during thermal testing and
317 evaluation.

318 • **Fans**

319 Products that employ on-board cooling fans must provide a technical specification sheet for
320 each fan type employed in the product, family group, or spectral sub-group, as applicable. The
321 fan specification sheet must state the lifetime of the fan and a reference operating temperature
322 rating for that lifetime claim. The lifetime must be at least 50,000 hours, at an operating
323 temperature at or above the fixture's highest rated ambient temperature.

324 If the product is available with multiple fan models:

- 325 ○ If fan model variations result in substantively different component temperature or
326 wattage consumption by the fixture (determined at the DLC's discretion), a family
327 grouping application is required with model numbers to represent the different fan
328 variations. DLC reviewers will examine fan model power levels and flow rate to
329 determine this distinction. Products that offer fan variations without substantively
330 different component temperature or wattage consumption by the fixture are allowed to
331 qualify using bracketed variations within a single model number.
- 332 ○ Multiple fan variations require a similar testing and reporting plan to multiple driver
333 variations, as noted in the efficacy section.

334 **Electrical Performance/Power Quality**

335 The DLC requires testing and reporting of the following items to characterize the electrical performance
336 of the fixture:

337 • **Power Factor**

338 Products must have a measured power factor of ≥ 0.90 at any rated input voltage at full output
339 or non-dimmed state.

340 • **Total Harmonic Distortion, current (THDi)**

341 Products must have a measured THDi of $\leq 20\%$ at any rated input voltage at full output or non-
342 dimmed state.

343 For products with driver variations, including input voltage variations, electrical testing of each product
344 must be performed, sufficient to characterize the power quality of each driver, at its applicable nominal
345 input voltages and maximum designed output power. Testing to demonstrate that products are
346 compliant with the power factor and total harmonic distortion requirements may be done on an in-

347 house or benchtop setup for practical simplicity, and results must be documented and included in the
348 application materials. Please see the efficacy section for more information on the use of this electrical
349 testing for worst-case efficacy driver variation determination. Please refer to the [Family Grouping](#)
350 [Testing Requirements for LED-based Horticultural Lighting](#) for specific testing and reporting
351 requirements for product families.

352 **Safety**

353 Products must be certified by an OSHA NRTL or SCC-recognized body to ANSI/UL 8800 (ANSI/CAN/UL
354 8800) which is applicable for *horticultural lighting products* by that safety organization.

355 For illustrative and reference purposes, practices of acceptable safety organizations are described
356 below:

- 357 • **UL**
358 Fixture manufacturers who use UL for safety certification purposes are required to be listed on
359 the UL Certification Directory under the designation IFAU.
- 360 • **ETL/Intertek**
361 Fixture manufacturers who use ETL for safety certification are required to be listed on the ETL
362 Certification Directory, specifically as Horticultural Fixtures.
- 363 • **CSA Group**
364 Fixture manufacturers who use CSA for safety certification are required to be listed under CSA
365 Group's Classes defined for horticultural lighting equipment in Canada and the US.
- 366 • **TÜV SÜD**
367 Fixture manufacturers who use TÜV SÜD for safety certification are required to be listed on the
368 TÜV SÜD Certification Directory, specifically as a light fixture for use on horticulture purposes.
- 369 • **SGS**
370 Fixture manufacturers who use SGS for safety certification are required to be listed on the SGS
371 Certification Directory, specifically as horticultural lighting equipment.
- 372 • **Other safety organizations**
373 To be added to the DLC's approved list of safety organizations who certify horticultural lighting
374 equipment per ANSI/CAN/UL 8800 requirements, please contact horticulture@designlights.org.

375 **Special Considerations**

376 **Special Considerations for Spectrally Tunable Products**

377 Spectrally tunable products (those with varying output channels beyond simple, single-axis dimming of
378 the whole product) are eligible with the following conditions:

- 379 • The threshold-qualifying state to be tested must be the manufacturer-designed state with the
380 highest power consumption ("maximum power"). This may or may not be the same as an "all
381 channels on" condition since fixtures may not be designed to use all their channels
382 simultaneously. Test reports must specifically indicate that the product is operated in this

383 “maximum power” condition during the testing, with a description of the control narrative to
384 ensure that the power state is at its maximum designed level.

385 • In addition to the “maximum power” condition, applicants must perform PPF testing for each
386 control channel, in which the channel under test must be set to the maximum designed output,
387 while all other channels must be set to their minimum designed output for this state. The test
388 report must present an identifying name of this channel and setting, the PPF (400-700nm total
389 and 400-500nm, 500-600nm, and 600-700nm “bins” PPF) and PF_{FR} (700-800nm) for each of the
390 single-channel scenarios, and a description of the control narrative to achieve each setting. For
391 each channel tested, a corresponding graphic for the SQD produced in that setting must be
392 provided in the application. Refer to the SQD section for reporting requirements.

393 ○ The flux output of each specific channel testing is displayed on the DLC Horticultural
394 QPL, with the per-channel test outcomes and identifying information for each setting.
395 These data are intended to support standardized communication of information about
396 the product’s spectral tuning range, aiding product selection and user acceptance.

397 • Applicants must provide user-facing documentation narrating the control protocol and input
398 parameters employed in controlling the output.

399 • For PFM_P and PFM_{FR} evaluation:

400 ○ Provisions for products utilizing multiple types of LEDs must be followed as described in
401 the “[For fixtures using multiple types of LEDs](#)” section.

402 ○ ISTMT testing must be provided on the hottest of each of the LED types. For each
403 unique LED type, ISTMT testing must occur at the operating mode that produces the
404 highest operating temperature in the fixture for this LED type. Test reports must
405 specifically indicate that the product is operated in this “highest operating temperature”
406 condition during the testing, with a description of the control narrative to ensure that
407 the power state is at its highest operating temperature designed level.

408 ○ The DLC asks any applicants considering LM-84-based maintenance testing on a
409 spectrally tunable fixture to contact horticulture@designlights.org to discuss their
410 proposed testing plan.

411 **Special Considerations for DC-Powered Fixtures**

412 **Eligibility Information**

413 Horticultural lighting fixtures powered by direct current (DC) are eligible for listing on the Horticultural
414 QPL. DC-powered fixtures include two types:

415 • **Modular and/or dynamically configurable fixtures where one or several AC-to-DC power**
416 **sources supply power to multiple fixtures/modules.** The power source(s) may have a minimum
417 as well as a maximum number of fixtures that they may serve. The AC-to-DC power source(s)
418 may be attached to one of the fixtures or may be located remotely from the fixtures. The power
419 source(s) must be marketed by the fixture manufacturer as the intended power source(s) for
420 that specific fixture model or family.

- 421 • **Fixtures that operate on DC power, where an AC-to-DC power source is not marketed by the**
422 **fixture manufacturer as the intended power source.** These fixtures may be wired to an AC-to-
423 DC power source outside the fixture or in a separate room, or may be part of a DC-only
424 horticultural facility.

425

426 **Technical Requirements for DC-Powered Fixtures**

427 All V2.1 Horticultural Lighting Technical Requirements described in **Table 1** must be met in addition to
428 the following requirements, with exceptions as noted.

429 The following requirements apply to applications for DC-powered fixtures, in place of the equivalent AC
430 testing and reporting:

- 431 • **DC-powered “all-on” photon flux test report:** Applicants must provide an LM-79 report in PDF
432 format from an accredited third-party test lab with all required photon flux and power values for
433 verification, including DC voltage, current, and power. For dimmable or tunable products, this is
434 the test report of the product at its maximum (non-dimmed) power state.
- 435 • **Power source test report:** If power sources are marketed with the DC-powered fixture,
436 applicants must provide a table of the following performance values for all power sources
437 offered for sale with the DC fixture. These values may come from benchtop testing
438 (measurements performed by a manufacturer that are not from a certified testing lab). All
439 values must be provided at the rated minimum and maximum AC input voltages for each power
440 source, as well as at each DC output voltage utilized by the DC-modular fixture (if multiple). A
441 power source specification sheet or other documentation from the power source manufacturer
442 with numerical values listed for each load point may satisfy this requirement, in place of testing.
- 443 ○ Performance values must be provided at each of two load points as determined by the
444 fixture manufacturer:
 - 445 ■ Maximum power load, i.e. the load representing the maximum number of light
446 fixtures that can be powered by this power source.
 - 447 ■ The load point of the power source between maximum power load and 20% of
448 maximum load that results in the worst-case power source efficiency.
 - 449 – Only load points achievable with multiples of this fixture at full output
450 need to be considered in identifying the worst-case power source
451 efficiency. For example, for a 100W power source that may power
452 either two or three 30W fixtures, only the 60% and 90% loading
453 conditions need to be compared to determine the worst-case efficiency.
 - 454 – A lower limit on load points may also be set by the loading requirement
455 for a given power source listed on the fixture specification sheet. For
456 example, “Required operating range of 15-90W output at 100W input
457 power.”
 - 458 ○ Performance values to be reported in the power source test report:
 - 459 ■ Nominal AC input voltage

- 460 ▪ Maximum output power of the power source at the specified input voltage,
- 461 shown to the nearest watt
- 462 ▪ Minimum and maximum output power for the specific combination of power
- 463 source and horticultural fixture at full output, shown to the nearest watt
- 464 ▪ Loading percentage (the ratio of tested DC output power to maximum output
- 465 power with this fixture), shown to the nearest tenth of a percent
- 466 ▪ Tested AC input power, shown to the nearest hundredth of a watt
- 467 ▪ Tested DC output power, shown to the nearest hundredth of a watt
- 468 ▪ Electrical efficiency (power source output power divided by power source input
- 469 power), shown as a percentage to two decimal places
- 470 ▪ Power factor, shown to three decimal places
- 471 ▪ Total harmonic distortion of the current waveform as a percentage, shown to
- 472 one decimal place
- 473 ○ The following example shows this table for a single power source:

Manufacturer Name		Model Number				AC Input Voltage Range (V)		DC Output Voltage Range (V)		
ABC Corp.		ABC123				120-277		48		
Nominal AC Input Voltage (V)	Power Source Maximum Output (W) [Output rating irrespective of fixture]	Minimum Output Power with this fixture type (W) [fixture type at full output]	Maximum Output Power with this fixture type (W) [fixture type at full output]	Loading Scenario	Loading Percentage (%) [Relative to maximum for this fixture type-power source combination]	Tested AC Input Power (W)	Tested DC Output Power (W)	Tested Efficiency (%)	Power Factor	Total Harmonic Distortion (current) (%)
120	3100	300	3000	Full	100.0	3115.23	3000.00	96.30	0.932	5.0
				Worst-Case Efficiency	20.0	677.63	600.00	88.54	0.914	4.0
277	3100	300	3000	Full	100.0	3098.02	3000.00	96.84	0.932	5.6
				Worst-Case Efficiency	20.0	665.19	600.00	90.20	0.911	5.9

- 474
- 475 ○ Fixtures where no AC-to-DC power source is marketed by the fixture manufacturer as
- 476 the intended power source with any AC-to-DC power source are not required to provide
- 477 a power source test report. These products will be listed with an assumed AC-to-DC
- 478 conversion efficiency (see below).
- 479 • Consistent with the Horticultural Technical Requirements for drivers, power source ISTMT
- 480 reports are required for all horticultural products sold with AC-to-DC and DC-to-DC power
- 481 sources, as applicable. DC-to-DC power source ISTMT reports are required for both DC fixture
- 482 types described in the “Eligibility Information” section above.
- 483 ○ DC-to-DC power sources include any component that modifies the current or voltage
- 484 input to the LED chips, either in value relative to input (e.g. a voltage converter) or value
- 485 over time (e.g. a constant current power source).
- 486 ○ AC-to-DC power sources, in the context of DC-powered products, include components
- 487 external to the listed product that convert AC power to DC power.
- 488 • Manufacturers must provide information or specifications for DC cabling on the fixture
- 489 specification sheets or supplemental marketing documentation. Guidance for maintaining
- 490 cabling losses to less than 2% for a fully loaded power supply must be detailed.

- 491 ○ The fixture wattage in the cabling guidance must match the input power of the
492 submitted fixture, and the cabling losses must reflect the copper resistance values listed
493 in [NFPA 70 National Electrical Code, 2020 Edition](#). Applicants may choose their own
494 tradeoff of cabling gauge and length, as long as it conforms with cabling information
495 provided on the fixture specification sheet.

496 **QPL Listing Information**

497 DC-powered fixtures will be listed on the Horticultural Lighting QPL with the following differences from
498 AC-powered fixtures:

499 The following new fields will be listed on the QPL. Unless noted below, all DC numerical fields below will
500 have an equivalent tested value and reported, or nominal, value provided by the submitter in the
501 review.

- 502 • **“Input Power Type”** will be distinguished between AC and DC products.
- 503 • **“Tested Voltage”** and **“Tested DC Input Current”**, from the all-on DC-powered LM-79 photon
504 flux report for both DC-powered fixture types. Nominal values for “Reported Maximum Input
505 Voltage”, “Reported Minimum Input Voltage”, and “Reported DC Input Current”, are provided
506 by the submitter during the application submittal.
- 507 • **“DC Input Wattage”** and **“DC Photosynthetic Photon Efficacy (μmol/J) (400-700nm)”** will display
508 the values from the all-on DC-powered LM-79 photon flux report.
 - 509 ○ Optional new field **“DC PE_{PBAR} (μmol/J) (280-800nm)”** will be reported if “DC PF_{PBAR}
510 (μmol/J) (280-800nm)” is reported.
- 511 • New fields will display **“AC De-rated Input Wattage”** and **“AC De-rated PPE (μmol/J) (400-
512 700nm)”** only for DC-powered fixtures.
 - 513 ○ DC-powered fixtures shall meet the PPE threshold requirement at their AC de-rated PPE
514 value.
 - 515 ▪ For example, a 100W lightbar with a DC-powered PPE of 2.0 μmol/J and a power
516 source with a worst-case efficiency of 95% at 20% load would be listed on the
517 QPL at 1.9 μmol/J AC De-rated PPE and 105W AC De-rated Input Wattage.
 - 518 ▪ The fields currently used for “Photosynthetic Photon Efficacy: 400-700 nm,
519 μmol/J (PPE) (AC)” will not be populated.
 - 520 ○ DC-powered fixtures marketed with any AC-to-DC power source will reflect the power
521 efficiency of the AC-to-DC conversion at the load condition that creates the worst-case
522 efficiency.
 - 523 ▪ For example, a 100W lightbar with a PPE of 2.5 μmol/J and a power supply
524 showing a worst-case efficiency of 85% at 20% load, would be listed on the QPL
525 at 2.13 μmol/J and 118W.
 - 526 ○ DC-powered fixtures that are not marketed with any AC-to-DC power source will display
527 values in the AC de-rated fields based on an assumed 87.5% conversion efficiency.

- 528 87.5% is informed by the [Federal Standard 10 C.F.R. § 430.32\(w\)](#) for minimum efficiency
529 for external power supplies greater than 250W.
- 530 ○ Optional new field **“AC De-rated PE_{PBAR} (μmol/J) (280-800nm)”** will be reported if “DC
531 PE_{PBAR} (μmol/J) (280-800nm)” is reported.
 - 532 ○ **“Power Source Loading Percentage”** will display the fixture loading that creates the
533 worst-case efficiency used in the de-rating calculations and the power source load point
534 that creates that worst-case condition, in the format "AC-derated performance is
535 91.12% efficiency at 20% loading on a 3000W power source at 120V."
 - 536 ● **“Cabling Loss Example”** will show an example of cabling length and gauge that results in cabling
537 losses less than 2% for a fully-loaded power supply will be displayed.
 - 538 ○ For example: “Nine 300W fixtures parallel-wired with 100 feet of 10AWG cabling to a
539 3,000W power supply channel.”
 - 540 ○ This field will be populated only for DC-powered fixtures marketed with an AC-to-DC
541 power source.
 - 542 ● The worst-case values of total harmonic distortion (current) and power factor from the Tested
543 Power Source Table will be shown in the existing fields for **“Total Harmonic Distortion”** and
544 **“Power Factor.”** THDi and power factor fields will be populated only for fixtures marketed with
545 an AC-to-DC power source.

546 **Special Considerations for Externally Supplied Actively Cooled Fixtures**

547 **Eligibility Information**

548 LED horticultural fixtures that employ externally supplied circulating liquid are eligible with the following
549 conditions described below.

- 550 ● The DLC defines externally supplied circulating-liquid-cooled horticultural fixtures to be products
551 in which liquid, often water or a water/glycol solution, flows through input and output ports of
552 each fixture in the system, being channeled through a cooling plate or other heat exchanger
553 within the fixture.
- 554 ● LED horticultural fixtures that employ externally supplied ducted forced air are not eligible at
555 this time. For simplicity, Version 2.1 may refer to eligible externally supplied actively cooled
556 fixtures as ‘actively cooled’.

557

558 **Technical Requirements for Externally Supplied Actively Cooled Fixtures**

559 All V2.1 Horticultural Lighting Technical Requirements described in **Table 1** must be met in addition to
560 the following requirements and clarifications:

- 561 ● Manufacturers must specify information regarding allowable operating conditions that affect
562 product performance, including:



- 563
- **Solution type/concentration:**
 - Restrictions or limitations to allowable solution type/concentration must be described in marketing material/specification sheets and will be reported on the Hort QPL.
 - **Inlet fluid temperature range:**
 - Minimum and maximum allowable operating inlet fluid temperatures must be stated in marketing material/specification sheets and will be reported on the Hort QPL.
 - Data describing the performance impact of varying inlet fluid temperature on measured PPF and measured input power of the fixture, reported in increments of 5 degrees Celsius (or smaller) covering the complete allowable inlet fluid temperature range, must be provided. A template file will be available for actively cooled applications to capture this data. The template file will be used to generate and report an image of this data on the QPL.
 - Flow rate must be held constant across the allowable temperature range and shall be reported.
 - Measured PPF as a function of inlet fluid temperature data and measured input power as a function of inlet fluid temperature data must be provided and will be reported on the Hort QPL.
 - All temperature values shall be reported in degrees Celsius.
 - **Self-protect cut-off functionality:**
 - Fail to off functionality must be present to turn off the actively cooled fixture before a maximum inlet fluid temperature is reached, in the event that the external cooling system fails.
 - Self-protect cutoff temperature must be stated in manufacturer-provided marketing material/specification sheet and will be reported on the Hort QPL.
- All inlet fluid temperatures must be maintained within a tolerance of +/- 2.5 degrees Celsius to the target temperature during LM-79 and ISTMT testing.
 - LM-79 testing must employ water as the cooling liquid at an appropriate flow rate to maintain the targeted *median inlet fluid temperature* (i.e. middle operating inlet fluid temperature in the allowable range) as defined by the luminaire manufacturer.
 - The average and maximum inlet fluid temperature measured during LM-79 testing (measured at fixture-level stabilization per LM-79), within the allowable 5-degree Celsius range, shall be provided and reported on the Hort QPL.
 - ISTMT testing must employ water as the cooling liquid at an appropriate flow rate to maintain the targeted *worst-case inlet fluid temperature* (i.e. maximum allowable operating inlet fluid temperature) as defined by the luminaire manufacturer. The average and maximum inlet fluid temperature measured during ISTMT testing (at stabilization), within the allowable 5-degree Celsius range, must be provided and will be reported on the Hort QPL.
- 564
- 565
- 566
- 567
- 568
- 569
- 570
- 571
- 572
- 573
- 574
- 575
- 576
- 577
- 578
- 579
- 580
- 581
- 582
- 583
- 584
- 585
- 586
- 587
- 588
- 589
- 590
- 591
- 592
- 593
- 594
- 595
- 596
- 597
- 598
- 599
- 600
- 601

- 602 • Flow rate, measured in gallons per minute (GPM), must be recorded during LM-79 testing, with
603 the average and highest flow rate measurements being provided and reported on the Hort QPL.
- 604 • Outlet fluid temperature must be measured during LM-79 testing, with the average and highest
605 outlet fluid temperature reported on the Hort QPL.
- 606 • To support the qualification of externally supplied circulating liquid cooled horticultural fixtures,
607 the DLC will accept LM-79 gonioradiometric testing with methods or equipment ranging from
608 Type C goniometers to other gonioradiometer types.
 - 609 ○ All externally supplied circulating liquid cooled horticultural fixtures seeking qualification
610 by the DLC must test the fixture per ANSI/IES LM-79, including requirements specific to,
611 but not limited to, stabilization and optical measurements, while employing active
612 cooling.
 - 613 ○ The DLC reserves the right to require additional information on all LM-79 test reports
614 derived from non-Type-C gonioradiometer types.

615 **QPL Listing Information**

616 In addition to the existing fields, externally supplied actively cooled fixtures will have the following
617 information listed on the QPL:

- 618 • **“Active Cooling Presence”**
 - 619 ○ Externally supplied circulating liquid cooled horticultural fixtures will be distinguished as
620 “active cooling presence” and will be designated as such on the Hort QPL (e.g. as a
621 filterable field)
- 622 • **“Tested Inlet Fluid Temperature” and “Tested Flow Rate”**
 - 623 ○ Maximum measured inlet fluid temperatures and flow rates per ISTMT and LM-79
624 testing
 - 625 ○ Average measured inlet fluid temperatures and flow rates per ISTMT and LM-79 testing
- 626 • **“Tested Outlet Fluid Temperature”**
 - 627 ○ Maximum measured outlet fluid temperature per LM-79 testing
 - 628 ○ Average measured outlet fluid temperature per LM-79 testing
- 629 • Additional reporting fields, relating to the allowable operating conditions for the system
630 including:
 - 631 ○ **“Solution Concentration Restrictions”**
 - 632 ○ **“Minimum Allowable Inlet Fluid Temperature” and “Maximum Allowable Inlet Fluid
633 Temperature”**
 - 634 ○ **“Self-Protect Cut-Off Temperature”**
 - 635 ○ Reported data depicting **PPF and wattage as a function of inlet fluid temperature**

636 **Special Considerations for LED Replacement Lamps**

637 **Eligibility Information: Linear Replacement Lamps**

638 LED replacements for linear fluorescent lamps are eligible with the following conditions:

- 639 • The DLC defines all tube-style LED products that use lamp holders (i.e. sockets or tombstones)
640 in the luminaire to mechanically and/or electrically connect to the fixture housing and electric
641 supply to fall under these testing requirements. Products that do not employ lamp holders are
642 not eligible as lamps under this policy.
- 643 • The DLC defines bare lamp as the performance characteristics of a replacement lamp, including
644 the effects of an external ballast (for Type A and Dual Mode lamps) or driver (for Type C lamps),
645 if applicable, when operated outside of a luminaire or retrofit kit.
- 646 • The following linear lamp replacement types (i.e. T8, T5, or T5HO) and specific lengths are
647 eligible for listing. Marketing material must indicate that they are intended to replace
648 fluorescent lamps of the same type and length. Products of different lengths, bases, or
649 marketed as intended to replace other types of fluorescent lamps are not eligible. Products
650 intended to operate on magnetic ballasts or those with different base types are not eligible.
 - 651 ○ **T8 Two-Foot Linear Replacement Lamps**
 - 652 ▪ LED lamps intended to replace T8 fluorescent lamps. These LED lamps shall be
653 24 inches long and employ a G13 base.
 - 654 ○ **T8 Four-Foot Linear Replacement Lamps**
 - 655 ▪ LED lamps intended to replace T8 fluorescent lamps. These LED lamps shall be
656 48 inches long and employ a G13 base.
 - 657 ○ **T8 Eight-Foot Linear Replacement Lamps**
 - 658 ▪ LED lamps intended to replace T8 fluorescent lamps. These LED lamps shall be
659 96 inches long and employ a FA8 base.
 - 660 ○ **T5 Four-Foot Linear Replacement Lamps**
 - 661 ▪ LED lamps intended to replace T5 fluorescent lamps. These LED lamps shall be
662 46 inches long and employ a G5 base.
 - 663 ○ **T5HO Four-Foot Linear Replacement Lamps**
 - 664 ▪ LED lamps intended to replace T5HO (High Output) fluorescent lamps. These
665 LED lamps shall be 46 inches long and employ a G5 base.
- 666 • The following UL Types A, B, Dual Mode (AB) and C are eligible for listing.
 - 667 ○ **Internal Driver/Fluorescent Ballast (UL Type A):**
 - 668 ▪ Products of this type employ lamp holders to connect to the fixture being
669 retrofitted and are designed to be "plug and play" replacements for fluorescent
670 lamps. That is, products in this category operate utilizing an existing fluorescent
671 ballast, and do not require additional mechanical or electrical changes to the
672 fixture.

673



- 674 ○ **Internal Driver/Line Voltage (UL Type B):**
- 675 ▪ Products of this type employ lamp holders to connect to the fixture being
- 676 retrofitted, but do not operate utilizing the existing fluorescent ballast. These
- 677 products require rewiring of the existing fixture to bypass the ballast and send
- 678 line voltage directly to the lamp holders.

- 679 ○ **Dual Mode Internal Driver (UL Type A and Type B):**
- 680 ▪ Products of this type can either use the existing fluorescent ballast or be
- 681 operated using line voltage if the fixture is rewired to bypass the ballast. These
- 682 products connect to the fixture using standard lamp holders.

- 683 ○ **External Driver (UL Type C):**
- 684 ▪ Products in this category employ lamp holders to connect to the fixture being
- 685 retrofitted. They do not use the existing fluorescent ballast and require rewiring
- 686 of the existing fixture to replace the ballast with an external driver (i.e. the
- 687 driver is internal to the fixture but external to the lamp). The lamp holders are
- 688 then wired to connect to the external driver.

- 689 ▪ For Type-C lamp systems with non-identical lamps, refer to the *Special*
- 690 *Considerations for Linear Replacement Type-C Lamp Systems with Non-Identical*
- 691 *Lamps* as written in the [SSL Testing and Reporting Requirements for Linear](#)
- 692 [Replacement Lamps](#).
- 693

694 **Eligibility Information: Screw-Base Replacements for HID Lamps**

695 LED replacements for mogul-base high intensity discharge (HID) lamps are eligible with the following
696 conditions:

- 697 • The DLC accepts Horticultural QPL applications for mogul (E39 and E40) screw-base replacement
698 lamps. Only UL Type B products, which require removal of the existing ballast from the circuit
699 and the lamp holder to be wired with line voltage, are eligible.
- 700 ○ Other base types and UL Types are not eligible at this time.
- 701 ○ Lamps with [field adjustable light distribution \(FALD\)](#) are not eligible at this time.

702 **Technical Requirements Information: All Replacement Lamps**

- 703 • All replacement lamps seeking horticultural lighting qualification must test the bare lamp
704 according to LM-79 to meet all V2.1 Horticultural Lighting Technical Requirements for fixtures
705 as described in **Table 1**, except for driver lifetime and a five-year warranty. These exceptions are
706 described below:
- 707 ○ Instead of driver lifetime:
- 708 ▪ Lamps must have a lifetime of at least 50,000 hours.
- 709 ▪ Lamps must perform an In-Situ Temperature Measurement Test (ISTMT) and
710 report at the product’s highest rated ambient temperature using a location on
711 the lamp body, which will have the highest temperature of any point on the

- 712 lamp during normal operation, designated by the manufacturer to correlate to
713 the lifetime with the lifetime of the lamp.
- 714 ▪ Applicants must supply a technical specification sheet for their product,
715 showing the lifetime based on the given location’s operating temperature and
716 an image/diagram showing the temperature measurement point (TMP)
717 location on the lamp body for monitoring the operating temperature.
 - 718 ▪ In-situ temperature measurement testing must be conducted, and a report
719 must be provided with the application showing an operating temperature
720 measurement point (TMP) consistent with the specification sheet information
721 and measured temperature demonstrating that the lamp will have a lifetime of
722 at least 50,000 hours when operating at or above the highest rated ambient
723 temperature on the lamp’s specification sheet.
- 724 ○ Instead of a five-year warranty:
 - 725 ▪ LED replacement lamps must have a manufacturer-provided product warranty
726 of at least three years. All other requirements of warranty described in this
727 document still apply to lamps.
 - 728 ● In addition to meeting all V2.1 Horticultural Lighting Technical Requirements for fixtures (except
729 those noted above), lamps must meet the following additional requirements:
 - 730 ○ All replacement lamps must report beam angle² during the application process. This
731 information will be displayed on the QPL.
 - 732 ○ All replacement lamps must report product size information (length, width, height,
733 diameter, as applicable) on the technical specification sheet. This information will be
734 displayed on the QPL.

735 **Technical Requirements Information: Screw-Base Replacements for HID Lamps**

- 736 ● Screw-base replacements for HID lamps can be generally omni-directional (the DLC defines
737 omni-directional as a product that emits radiation in all directions except in the base direction)
738 or directional. Manufacturers must self-designate the lamp type using the “Lamp Category”
739 field.
 - 740 ○ In addition to beam angle, screw-base replacements for HID lamps must report field
741 angle³ during the application process. This information will be displayed on the QPL.
- 742 ● Screw-base replacements for HID lamps must report intended mounting position. PPID polar
743 plots must include tested mounting position.

744

² The angle, in degrees, between the two opposite directions in which the average intensity is 50% of the center beam intensity as measured in at least two rotational planes, 90° from each other, around and through the beam axis. (ANSI C78.379-2006)

³ The angle between the two directions for which the intensity is 10% of the maximum intensity as measured in a plane through the nominal beam centerline. (ANSI/IES RP-16-10)


745 **QPL Listing Information: All Replacement Lamps**

746 In addition to existing fields, replacement lamps will have the following information listed on the
747 Horticultural Lighting QPL:

- 748 • **“Lamp Category”**
 - 749 ○ Options include: Linear Replacement Lamp; Screw-Base Replacements for HID Lamps -
750 Omni-Directional; or Screw-Base Replacements for HID Lamps – Directional.
- 751 • **“Base Type”**
 - 752 ○ Options include: G13, G5, FA8, E39, E40.
- 753 • **“Product Size Information”**
 - 754 ○ Linear replacement lamps must complete the following fields on the application form:
755 “Nominal length (including pin bases)” and “diameter.”
 - 756 ■ **Figure 1** shows dimensions of a typical linear replacement lamp that shall be
757 reported on the application form.
 - 758 ○ Screw-base replacement lamps must complete the following fields on the application
759 form: “length,” “width,” “height.”
 - 760 ■ **Figure 2** shows dimensions of a typical screw-base replacement lamp that shall
761 be reported on the application form.
 - 762 ■ Width and height can be the same value if the lamp is round (sometimes
763 referred to as “corn-cob style”).
 - 764 ■ If the lamp is not round (sometimes referred to as “paddle style”), width should
765 be the maximum dimension perpendicular to the screw base.
 - 766 • **“UL Type”**
 - 767 ○ Options for Linear Replacement Lamps include: UL Type A, UL Type B, Dual Mode (UL
768 Type AB), UL Type C.
 - 769 ○ The only option for screw-base replacements for HID lamps is UL Type B.
 - 770 • **“Reported Beam Angle”**
 - 771 • **“Reported Field Angle”** (Screw-Base Replacements for HID Lamps only)
 - 772 • **“Intended Mounting”** (Screw-Base Replacements for HID Lamps only)
 - 773 ○ Options include: horizontal, vertical, or universal.



774
775 **Figure 1:** Dimensions of linear replacement lamps to be reported on the application form.
776

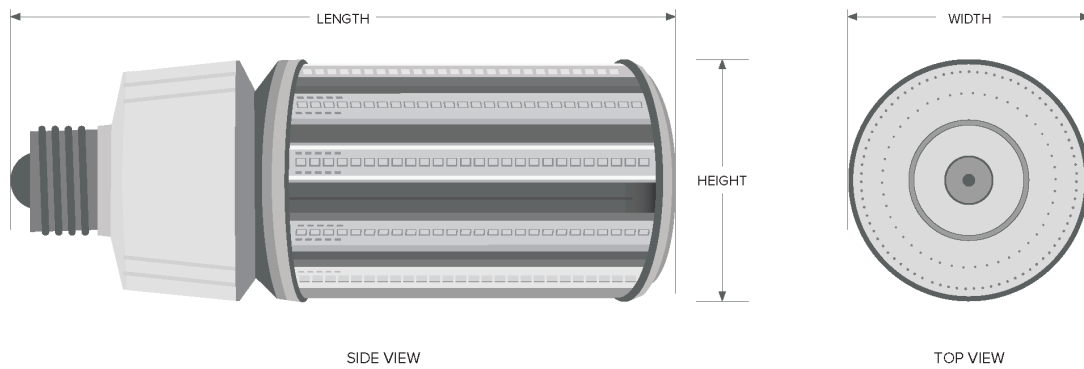

777

778

779

Figure 2: Dimensions of screw-base replacement lamps to be reported on the application form (“corn-cob style” example). If the lamp is not round, width should be the maximum dimension perpendicular to the screw base.

780 Tolerances

781

782

The DLC accepts measurement tolerances to most metrics listed in the Technical Requirements. Please refer to **Table 2** below for additional tolerance information.

783

Table 2: DLC Horticultural Lighting Technical Requirements Tolerances

Parameter/Attribute/Metric	V2.0 Tolerances
Photosynthetic Photon Efficacy	-5%
Power Factor	-3 percentage points
Total Harmonic Distortion	+5 percentage points
ISTMT Temperature Measurements	1.1°C or 0.4%, whichever is greater
LM-80 Drive Current	-5%

784

785

786

787

Tolerances are intended to account for all testing variation, rounding, and significant digits. The requirement values and tolerances will be interpreted by DLC review staff as exact requirements. While test labs will be expected to follow the requirements of their accreditation and relevant test standards,

788 DLC staff will not employ additional “rounding” to interpret values below the absolute thresholds as
789 passing. For example, if a horticultural lighting product is required to have a PPE of 1.9 with an efficacy
790 tolerance of -5%, any value for efficacy less than 1.81 will be interpreted as a failing value. It is the
791 applicant’s responsibility to check all data presented in an application before submission to ensure
792 compliance with the DLC requirements.

793 **Supporting Documentation**

794 **Test Reports**

795 The DLC requires that all testing be conducted at appropriately accredited laboratories except where
796 noted otherwise. Specifically:

- 797 • Testing of flux, intensity, and electrical characteristics must be conducted at laboratories that
798 are accredited to ISO 17025 and the appropriate reference test standard by accreditation bodies
799 that are signatories to the ILAC-MRA.
 - 800 ○ Labs conducting whole-fixture performance testing must also follow the [DLC](#)
801 [requirements for LM-79 labs](#).
- 802 • Labs conducting testing of device-level and/or fixture-level photon flux maintenance must also
803 follow the [DLC requirements for LM-80/LM-84 labs](#).
- 804 • Labs conducting *In-Situ Temperature Measurement Testing* (ISTMT) must meet at least one of
805 the following:
 - 806 ○ Approved by OSHA as Nationally Recognized Testing Laboratories (NRTLs)
 - 807 ○ Approved through an OSHA NRTL data acceptance program or OSHA Satellite
808 Notification and Acceptance Program (SNAP)
 - 809 ○ Accredited for ANSI/UL 1598 or CSA C22.2 No. 250.0-08, including Sections 19.7, 19.10-
810 16, by an accreditation organization that is an ILAC-MRA Signatory

811 **TM-33-18 Reporting and Photometric/Spectral Reporting Alternatives**

812 The DLC requires all applicants to submit accompanying .xml documents per ANSI/IES TM-33-18 for each
813 parent or single product to represent the spatial and spectral distribution of the tested fixture.

- 814 • The .xml document must be based on measured data from an accredited lab, accompanying the
815 LM-79 testing requirements for spectral and spatial measurements.
- 816 • The .xml document must include the spectral power distribution data, with an interval
817 resolution of 5nm or smaller over the photosynthetic and far-red range of wavelengths defined
818 by ANSI/ASABE S640 (400-800nm). The DLC also requires the distribution of photon flux per
819 photon wavelengths over the PBAR range (280-800nm) in the case that applicants provide PF_{PBAR}
820 and PE_{PBAR} data. Spectral data in 1nm intervals are acceptable. The spectral measurement
821 represents the integrated flux in all directions from the fixture, without directional spectral
822 information. Per TM-33-18, the data is reported in W/nm, not spectral quantum distributions.

- 823 All DLC developed and interim manufacturer submitted SQD images will report in $\mu\text{mol} \times \text{s}^{-1} \times$
824 nm^{-1} .
- 825 • The .xml document must also include the photosynthetic photon intensity distribution (PPID),
826 reported in $\mu\text{mol} \times \text{s}^{-1} \times \text{sr}^{-1}$, over the photosynthetic wavelengths defined by ANSI/ASABE S640
827 (400-700nm). PPID is the distribution of photosynthetic photon intensity per unit solid angle
828 leaving the fixture. Each measurement is integrated across the 400-700nm range leaving the
829 fixture and contains no granular spectral distribution information (i.e. color over angle).
 - 830 • TM-33 documents are separated into six elements: Version, Header, Luminaire, Equipment,
831 Emitter, and Custom Data. In addition to all 'required' elements per TM-33-18, the following
832 describes elements required by DLC for V2.0 compliance.
 - 833 ○ Header Element Required Fields
 - 834 ■ Manufacturer
 - 835 ■ Laboratory
 - 836 ■ Report Number
 - 837 ■ Report Date
 - 838 ○ Luminaire Element Required Fields
 - 839 ■ Dimensions
 - 840 ■ Shape
 - 841 ■ Number of Emitters
 - 842 ○ Emitter Element Required Fields
 - 843 ■ Quantity
 - 844 ■ Description
 - 845 ■ Input Wattage
 - 846 ■ Power Factor
 - 847 ■ Data Generation – Intensity Scaling element field shall be 'false'. Scaling with
848 respect to laboratory measurements will be not accepted. Angle interpolation
849 element must be 'true' or 'false', not blank.
 - 850 ■ Photon Data – Photon Intensity data fields shall include ONLY PPF (400-700 nm).
851 Photon Flux data field shall report ONLY PPF (400-700 nm).
 - 852 ■ Spectral Data – Spectral Intensity shall be reported. Additionally, Emitter Name
853 is required for spectrally tunable products.
 - 854 ○ Custom Data Element Required Fields
 - 855 ■ A custom data element called 'Radiant Power to PPF Scalar Multiplier' shall be
856 reported for the ratio of PPF to radiant watts within the PAR range (400–700
857 nm). The 'Any Data' field shall describe this scalar multiplier. Unique Identifier
858 data field must contain a Universally Unique Identifier (UUID), as defined by RFC
859 4122.
 - 860 • It is acceptable to report element fields described in TM-33-18 that are not detailed above. All
861 data shall be reported to the number of decimal places per the V2.0 Horticultural Lighting
862 Technical Requirements.

863 To facilitate time for labs to develop or purchase TM-33-18 reporting software, the DLC offers a 9 month
864 grace period for applicants to provide .xml documents compliant with TM-33 reporting for parent
865 products. If TM-33-18 reports are not available, applicants must submit LM-63 and TM-27 (i.e., .ies and
866 .spdx files, respectively) for parent products or single products.

- 867 • For manufacturers choosing to submit .ies and .spdx files instead of .xml documents in the
868 interim period, they must resubmit data compliant with TM-33-18 reporting requirements by
869 December 31, 2021, or the products will be delisted.
- 870 • The .ies files must contain [_OTHER] keywords to describe the units of intensity values and a
871 conversion factor relating photosynthetic photon intensity to luminous intensity (conversion
872 factor = PPF/lumens).

873 **Additional Application Details**

874 In addition to the test data noted in the sections above, the DLC requires the following for all
875 submissions:

- 876 • A completed web-based application form.
- 877 • Specification sheets (or “cut sheets”) for the product that include maximum ambient
878 temperature.
- 879 • Specification sheets for all drivers and fans employed in the product, including lifetime-at-
880 temperature information.
- 881 • Safety certificates of compliance as issued by the relevant safety body, attested to by the DLC
882 self-certification statement.
- 883 • If demonstrating flux maintenance at the device-level, a completed TM-21 calculator must be
884 provided for each LED device present in the fixture, with the applicable LM-80 and ISTMT
885 information for that LED device. If demonstrating flux maintenance at the fixture-level, a
886 completed TM-28 calculator must be provided for the fixture, with the applicable LM-84
887 information accompanying it.

888 The DLC will only accept applications for products with testing on the product submitted, with only
889 limited variations permitted as detailed in the sections above. Given the multiple options within product
890 families, the DLC offers the [Family Grouping Application Requirements for LED-based Horticultural
891 Lighting](#), which describes a method to determine “worst-case” product family members.